



DISPOSABLE EAR PLUGS

SAFETY SERIES INSTRUCTIONS FOR USE

CE 0194 EN352-2:2002


Notified body: INSPEC International Ltd, 56 Leslie Hough Way, Salford, Greater Manchester M6 6AJ. UK

OX-S246802 OX Disposable Ear Plugs - Un-Corded - 200 pk (200 single pair bags)

OX-S246902 OX Disposable Ear Plugs - Corded - 200 pk (200 single pair bags)

FITTING INSTRUCTIONS:

- Ensure hands and earplugs are clean prior to fitting.
- Roll earplug with tips of fingers to compact foam into a thin, crease-free cylinder.
- Insert the compressed earplug well into the ear canal. Pulling the ear outward and upward will make fitting easier.
- Ensure earplugs are suitably fitted as per the pictures below.

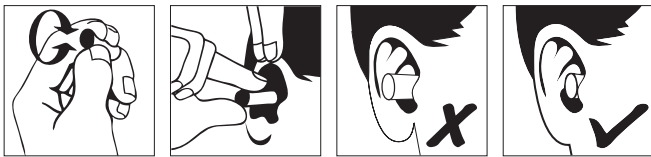

RECOMMENDATIONS:

- The wearer must ensure earplugs are fitted, adjusted and maintained in accordance with the manufacturer's instructions.
- These earplugs must be worn at all times in noisy environments.
- These disposable earplugs are for single use only.
- Store in a cool and dry place, away from direct sunlight, recommended shelf life is 12 months.
- Transport the ear plugs in original packaging.

WARNING:

- If the above recommendations are not adhered to, the protection afforded by these earplugs will be severely impaired.
- This product may be adversely affected by certain chemical substances, further information should be sought from the manufacturer.
- As required by European Health and Safety requirements, the user is advised that when the earplugs are in contact with the wearers skin, it may cause allergic reaction to susceptible individuals. If this is the case, leave the hazard area and remove the earplugs.
- For corded earplugs these should not be used where there is a risk that the connecting cord could be caught up during use.

LIMITATION:

- The single noise rating (SNR) quoted is based upon the attenuation of continuous noise and these earplugs may not be suitable to be used as the followings:
- Use in intermittent or impulsive noise environments where there is a need for high level of sound attenuation
- Use in environments that require additional attenuation for low frequencies in dominated high noise environments.

ATTENUATION DATA

OX-S246802 / OX-S246902	FREQUENCY (HZ)						
	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	33.0	33.3	36.1	37.1	36.1	41.8	38.5
Standard Deviation	6.7	7.6	7.4	4.7	4.8	3.6	3.9
Assumed Protection Value	26.3	25.7	28.7	32.4	31.3	38.2	34.6
H = 33dB		M = 31dB		L = 28dB		SNR = 34dB	
Nominal diameter 6-12							



For more information scan QR code or visit our website www.oxttools.co.uk/technical

Manufacturer Address

OX Products Group UK Ltd. Unit 2 Riverside,
Kangley Bridge Road, London SE26 5DA United Kingdom
Tel: 0044 (0)20 8676 9990 Fax: 0044 (0)20 8676 7520
sales.uk@oxttools.com www.oxttools.com

Our Ear Plugs are in conformity with the PPE Regulations (EU)2016/425.